

Installation & Operations Manual Yamaha Rhino Soft Top & Rear Panel



Seizmik makes Windshields, Doors, Tops, Hood Racks, Brush Guards, and other great accessories for utility vehicles & side x sides. Our products are engineered tough for long life and tested under the harshest of conditions. Always observe the warnings and precautions in this manual when using your Seizmik products. For best results, carefully follow the instructions in this manual and make no modifications.

Seizmik products are designed, developed and manufactured by Vialink Corp. If you have any questions, comments, need assistance, or are missing parts, please call 1-866-838-3366 ext. 110 between 9:00AM and 5:00PM EST. You can email us at support@seizmik.com.

How to use this manual:

- Be sure to read through the entire manual carefully before beginning installation.
- Read all warnings and precautions carefully and follow safety procedures
- Each Seizmik product has a "difficulty-to-install" rating based on the following:
 - Easy – uses basic hand tools and does not require any modifications to the existing structure of your vehicle. Most Seizmik products fall into this category. Hey, why be difficult?
 - Skilled – requires a little more skill to install properly. May require modifications to the vehicle (drilling, electrical, etc. as well as the use of power tools.
 - Difficult – May require welding or extensive mechanical work for proper installation. Hardly any Seizmik products fall into this category but we had to say it.
- Watch for the following symbols:



CAUTION – Indicates an installation or operational step or procedure that if not followed could result in damage to the product or you. Use caution when you see this symbol and follow all instructions.



TIP – Indicates an installation or operation tip. These tips can help you avoid installation problems, ensure safe and easy operation, and make sure everything goes smoothly.



WARNING – Indicates an installation or operational procedure that must be observed to prevent serious injury or death.

Installation information:

- This product has an installation rating of: **Easy**
- Approximate installation time: **5 Minutes**
- This product is easiest to install with: **2 people**

Trailer Info:

- ONLY trailer with rear window open and top fully and properly secured.
MAX SPEED – 55 MPH

Rhino Soft Top Installation (continued)



1. Stick one of the square adhesive velcro patches in the middle of the bend on the outside of the head rest support as shown to protect the plastic rear window. Place the other on the opposite side in the same place.



2. Lay the soft top over the roll cage of the vehicle making sure the straps are on the outside of the roll cage.



Tip – May be easier standing in bed of vehicle.



3. Locate the strap on the driver side at the top rear of the roll cage. Pull tight and fasten. Repeat this step for the passenger side of the top.

Note: Inner strap must go around main roll cage (large bar) and velcro over corner brace (small bar)

Rhino Soft Top Installation (continued)



4. Let the back panel fall in between the dump bed and the cab.



Tip – Raising bed will make installation easier



5. Wrap the Velcro tab located above the seat belt around the vertical portion of the roll cage as shown.

Continue wrapping the velcro tabs around the roll cage starting at the top and working down. Be sure the top is fastened **UNDER** the seat belt as shown. Repeat on opposite side.



CAUTION: DO NOT allow strap to hinder operation of the seat belt.



Tip – A good way to get the straps tight is to rotate the top around the bar like in the picture below

Rhino Soft Top Installation (continued)



7. Locate the straps at the top and fasten them together. Lastly, pull the straps until they pull the top tight across the roll cage.




Some adjustment may be necessary to ensure a proper fit.

Congratulations – You have now finished the installation of your Seizmik Rhino Soft Top.

Rhino Soft Top Features



A - The rear window can be rolled up by undoing step 5, rolling the window up from the bottom, and securing with the three straps at the top of the window as shown.

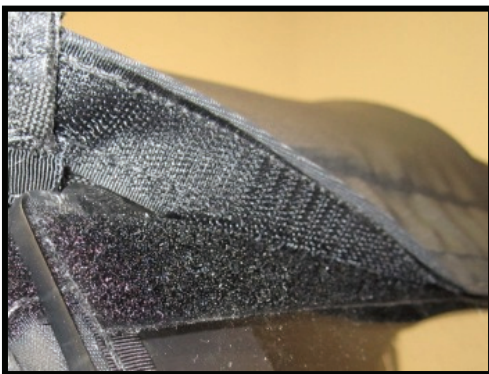

B – The velcro strip along the front of the soft top is so it can be attached to a windshield.

How to get Help - If you have any questions, comments, need assistance, or are missing parts, please call 1-866-838-3366 ext. 110 between 9:00AM and 5:00PM EST. You can email us at support@seizmik.com, visit www.seizmik.com to download installation guides and product info, or contact your powersports dealer where you purchased your Seizmik product if you need additional assistance.